


危险场所用电缆接头

EXIOS⁺ STANDARD
Metr., NPT


材料	黄铜
密封件	硅橡胶, VMQ
夹紧件	PA 6
铠装	金属铠装或屏蔽
防护等级	IP 66, 67 和 68 (5 bar)
环境温度	-60° C – 105° C (-76° F – 221° F)



提示:
- 不锈钢材质请垂询



		Armouring Ø mm									
AG	尺寸	Ø A1 mm	Ø A2 mm	GL mm	H max. mm	mm	D mm	夹紧圈1	夹紧圈2	夹紧圈3 可选	订货号
M 16 x1,5	20-1	6-12	3-8,1	16	69,5	22	27	0-0,7	0,7-1,25		1.605.1600.50
M 20 x1,5	20-1	6-12	3-8,1	16	69,5	22	27	0-0,7	0,7-1,25		1.605.2000.50
M 20 x1,5	20-2	9-16	6-12	16	74,3	24	29	0-0,7	0,7-1,25		1.605.2000.51
M 20 x1,5	20-3	12,5-20,5	9-14	16	80,5	30	35	0-0,7	0,7-1,4		1.605.2000.52
M 25 x1,5	20-3	12,5-20,5	9-14	16	80,5	30	35	0-0,7	0,7-1,4		1.605.2500.51
M 25 x1,5	25	16,9-26	12,5-20,5	16	91	36	42	0-0,7	0,9-1,6	0,7-1,4	1.605.2500.50
M 32 x1,5	32	22-33	16,9-26	16	96	46	52	0-0,7	1,3-2,0	0,7-1,4	1.605.3200.50
M 40 x1,5	40	28-41	22-33	16	107	55	64	0-0,7	1,3-2,0	0,7-1,4	1.605.4000.50
M 50 x1,5	50	36-52,6	28,9-44,4	16	131,5	65	73	0-1,0	1,5-2,5	1,0-2,0	1.605.5000.50
M 63 x1,5	63	46-65,3	39,9-56,3	16	144,5	80	90	0-1,0	1,5-2,5	1,0-2,0	1.605.6300.50
M 75 x1,5	75	57-78	50,5-68,2	16	154	95	107	0-1,0	1,5-2,5	1,0-2,0	1.605.7500.50
NPT 3/8"	20-1	6-12	3-8,1	16	69,5	22	27	0-0,7	0,7-1,25		1.605.3800.70
NPT 1/2"	20-2	9-16	6-12	20	74,3	24	29	0-0,7	0,7-1,25		1.605.1200.70
NPT 1/2"	20-3	12,5-20,5	9-14	20	80,5	30	35	0-0,7	0,7-1,4		1.605.1200.71
NPT 3/4"	25	16,9-26	12,5-20,5	20,5	91	36	42	0-0,7	0,9-1,6	0,7-1,4	1.605.3400.70
NPT 1"	32	22-33	16,9-26	25	96	46	52	0-0,7	1,3-2,0	0,7-1,4	1.605.1000.70
NPT 1 1/4"	40	28-41	22-33	26	107	55	64	0-0,7	1,3-2,0	0,7-1,4	1.605.5400.70
NPT 1 1/2"	40	28-41	22-33	26,5	107	55	64	0-0,7	1,3-2,0	0,7-1,4	1.605.6400.70
NPT 2"	50	36-52,6	28,9-44,4	27	131,5	65	73	0-1,0	1,5-2,5	1,0-2,0	1.605.2000.70
NPT 2 1/2"	63	46-65,3	39,9-56,3	40	144,5	80	90	0-1,0	1,5-2,5	1,0-2,0	1.605.5200.70
NPT 3"	75	57-78	50,5-68,2	41,5	154	95	107	0-1,0	1,5-2,5	1,0-2,0	1.605.3000.70

EXIOS⁺ STANDARD

Metr., NPT



II 2G Ex de IIC Gb
II 1D Ex ta IIIC Da

ATEX^{Ex} BVS-10-ATEX-E-062-X

BVS 10.0078X

POCC-RU-0001-11TB05

AEX-13499-X



材料 黄铜镀镍

密封件 硅橡胶, VMQ


夹紧件 PA 6

铠装 金属铠装或屏蔽

防护等级 IP 66, 67 和 68 (5 bar)

环境温度 - 60° C – 105° C (- 76° F – 221° F)

提示:
– 不锈钢材质请垂询



AG	尺寸							Armouring Ø mm		夹紧圈1	夹紧圈2	夹紧圈3 可选	订货号
		Ø A ₁ mm	Ø A ₂ mm	GL mm	H max. mm	mm	D mm						
M 16 x1,5	20-1	6-12	3-8,1	16	69,5	22	27			0-0,7	0,7-1,25		1.605.1603.50
M 20 x1,5	20-1	6-12	3-8,1	16	69,5	22	27			0-0,7	0,7-1,25		1.605.2003.50
M 20 x1,5	20-2	9-16	6-12	16	74,3	24	29			0-0,7	0,7-1,25		1.605.2003.51
M 20 x1,5	20-3	12,5-20,5	9-14	16	80,5	30	35			0-0,7	0,7-1,4		1.605.2003.52
M 25 x1,5	20-3	12,5-20,5	9-14	16	80,5	30	35			0-0,7	0,7-1,4		1.605.2503.51
M 25 x1,5	25	16,9-26	12,5-20,5	16	91	36	42			0-0,7	0,9-1,6	0,7-1,4	1.605.2503.50
M 32 x1,5	32	22-33	16,9-26	16	96	46	52			0-0,7	1,3-2,0	0,7-1,4	1.605.3203.50
M 40 x1,5	40	28-41	22-33	16	107	55	64			0-0,7	1,3-2,0	0,7-1,4	1.605.4003.50
M 50 x1,5	50	36-52,6	28,9-44,4	16	131,5	65	73			0-1,0	1,5-2,5	1,0-2,0	1.605.5003.50
M 63 x1,5	63	46-65,3	39,9-56,3	16	144,5	80	90			0-1,0	1,5-2,5	1,0-2,0	1.605.6303.50
M 75 x1,5	75	57-78	50,5-68,2	16	154	95	107			0-1,0	1,5-2,5	1,0-2,0	1.605.7503.50
NPT 3/8"	20-1	6-12	3-8,1	16	69,5	22	27			0-0,7	0,7-1,25		1.605.3803.70
NPT 1/2"	20-2	9-16	6-12	20	74,3	24	29			0-0,7	0,7-1,25		1.605.1203.70
NPT 1/2"	20-3	12,5-20,5	9-14	20	80,5	30	35			0-0,7	0,7-1,4		1.605.1203.71
NPT 3/4"	25	16,9-26	12,5-20,5	20,5	91	36	42			0-0,7	0,9-1,6	0,7-1,4	1.605.3403.70
NPT 1"	32	22-33	16,9-26	25	96	46	52			0-0,7	1,3-2,0	0,7-1,4	1.605.1003.70
NPT 1 1/4"	40	28-41	22-33	26	107	55	64			0-0,7	1,3-2,0	0,7-1,4	1.605.5403.70
NPT 1 1/2"	40	28-41	22-33	26,5	107	55	64			0-0,7	1,3-2,0	0,7-1,4	1.605.6403.70
NPT 2"	50	36-52,6	28,9-44,4	27	131,5	65	73			0-1,0	1,5-2,5	1,0-2,0	1.605.2003.70
NPT 2 1/2"	63	46-65,3	39,9-56,3	40	144,5	80	90			0-1,0	1,5-2,5	1,0-2,0	1.605.5203.70
NPT 3"	75	57-78	50,5-68,2	41,5	154	95	107			0-1,0	1,5-2,5	1,0-2,0	1.605.3003.70


危险场所用电缆接头

EXIOS⁺ BARRIER
Metr., NPT


材料	黄铜
密封件	硅橡胶, VMQ
夹紧件	PA 6
铠装	金属铠装或屏蔽
复合层	环氧树脂胶泥
防护等级	IP 66, 67 和 68 (5 bar)
环境温度	- 60° C – 85° C (- 76°F – 185°F)



提示:
– 不锈钢材质请垂询

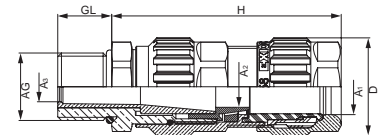

		Armouring Ø mm										订货号
AG	尺寸	Ø A1 mm	Ø A2 mm	Ø A3 mm	GL mm	H max. mm	mm	D mm	Max. No. Cores	夹紧圈1	夹紧圈2	
M 16 x1,5	20-1	6 – 12	8,2	7,9	16	68,5	22	27	8	0 – 0,7	0,7 – 1,25	1.606.1600.50
M 20 x1,5	20-1	6 – 12	8,2	7,9	16	68,5	22	27	8	0 – 0,7	0,7 – 1,25	1.606.2000.50
M 20 x1,5	20-2	9 – 16	12	8,8	16	74,3	24	29	10	0 – 0,7	0,7 – 1,25	1.606.2000.51
M 20 x1,5	20-3	12,5 – 20,5	14	11,5	16	80,5	30	35	15	0 – 0,7	0,7 – 1,4	1.606.2000.52
M 25 x1,5	20-3	12,5 – 20,5	14	11,5	16	80,5	30	35	15	0 – 0,7	0,7 – 1,4	1.606.2500.51
M 25 x1,5	25	16,9 – 26	20	16,4	16	91	36	42	25	0 – 0,7	0,9 – 1,6	1.606.2500.50
M 32 x1,5	32	22 – 33	26	21,4	16	96	46	52	45	0 – 0,7	1,3 – 2,0	1.606.3200.50
M 40 x1,5	40	28 – 41	33,2	27,6	16	107	55	64	70	0 – 0,7	1,3 – 2,0	1.606.4000.50
M 50 x1,5	50	36 – 52,6	44,2	37,5	16	131,5	65	73	85	0 – 1,0	1,5 – 2,5	1.606.5000.50
M 63 x1,5	63	46 – 65,3	56,2	47,3	16	144,5	80	90	120	0 – 1,0	1,5 – 2,5	1.606.6300.50
M 75 x1,5	75	57 – 78	68,2	58,0	16	154	95	107	150	0 – 1,0	1,5 – 2,5	1.606.7500.50
NPT 3/8"	20-1	6 – 12	8,2	7,9	16	64	22	27	8	0 – 0,7	0,7 – 1,25	1.606.3800.70
NPT 1/2"	20-2	9 – 12	12	8,8	20	68	24	29	10	0 – 0,7	0,7 – 1,25	1.606.1200.70
NPT 1/2"	20-3	12,5 – 20,5	14	11,5	20	73	30	35	15	0 – 0,7	0,7 – 1,4	1.606.1200.71
NPT 3/4"	25	16,9 – 26	20	16,4	20,5	81,3	36	42	25	0 – 0,7	0,9 – 1,6	1.606.3400.70
NPT 1"	32	22 – 33	26	21,4	25	85,5	46	52	45	0 – 0,7	1,3 – 2,0	1.606.1000.70
NPT 1 1/4"	40	28 – 41	33,2	27,6	26	94,4	55	64	70	0 – 0,7	1,3 – 2,0	1.606.5400.70
NPT 1 1/2"	40	28 – 41	33,2	27,6	26,5	94,4	55	64	70	0 – 0,7	1,3 – 2,0	1.606.6400.70
NPT 2"	50	36 – 52,6	44,2	37,5	27	116,3	65	73	85	0 – 1,0	1,5 – 2,5	1.606.2000.70
NPT 2 1/2"	63	46 – 65,3	56,2	47,3	40	127,6	80	90	120	0 – 1,0	1,5 – 2,5	1.606.5200.70
NPT 3"	75	57 – 78	68,2	58,0	41,5	136,5	95	107	150	0 – 1,0	1,5 – 2,5	1.606.3000.70

EXIOS⁺ BARRIER

Metr., NPT



**I M2 Ex de I Mb IIC Gb
I M2 Ex ta I IIC Da**



Sira-11-ATEX-1110-X



Sir 11.0044X



材料 黄铜镀镍

密封件 硅橡胶, VMQ

夹紧件 PA 6


铠装 金属铠装或屏蔽

复合层 环氧树脂胶泥

防护等级 IP 66, 67 和 68 (5 bar)

环境温度 -60° C – 85° C (-76°F – 185°F)

提示:
– 不锈钢材质请垂询

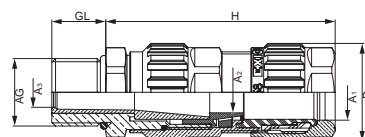

AG	尺寸	Armouring Ø mm										订货号
		Ø A1 mm	Ø A2 mm	Ø A3 mm	GL mm	H max. mm	mm	D mm	Max. No. cores	夹紧圈1	夹紧圈2	
M 16 x1,5	20-1	6-12	8,2	7,9	16	68,5	22	27	8	0-0,7	0,7-1,25	1.606.1603.50
M 20 x1,5	20-1	6-12	8,2	7,9	16	68,5	22	27	8	0-0,7	0,7-1,25	1.606.2003.50
M 20 x1,5	20-2	9-16	12	8,8	16	74,3	24	29	10	0-0,7	0,7-1,25	1.606.2003.51
M 20 x1,5	20-3	12,5-20,5	14	11,5	16	80,5	30	35	15	0-0,7	0,7-1,4	1.606.2003.52
M 25 x1,5	20-3	12,5-20,5	14	11,5	16	80,5	30	35	15	0-0,7	0,7-1,4	1.606.2503.51
M 25 x1,5	25	16,9-26	20	16,4	16	91	36	42	25	0-0,7	0,9-1,6	1.606.2503.50
M 32 x1,5	32	22-33	26	21,4	16	96	46	52	45	0-0,7	1,3-2,0	1.606.3203.50
M 40 x1,5	40	28-41	33,2	27,6	16	107	55	64	70	0-0,7	1,3-2,0	1.606.4003.50
M 50 x1,5	50	36-52,6	44,2	37,5	16	131,5	65	73	85	0-1,0	1,5-2,5	1.606.5003.50
M 63 x1,5	63	46-65,3	56,2	47,3	16	144,5	80	90	120	0-1,0	1,5-2,5	1.606.6303.50
M 75 x1,5	75	57-78	68,2	58,0	16	154	95	107	150	0-1,0	1,5-2,5	1.606.7503.50
NPT 3/8"	20-1	6-12	8,2	7,9	16	64	22	27	8	0-0,7	0,7-1,25	1.606.3803.70
NPT 1/2"	20-2	9-12	12	8,8	20	68	24	29	10	0-0,7	0,7-1,25	1.606.1203.70
NPT 1/2"	20-3	12,5-20,5	14	11,5	20	73	30	35	15	0-0,7	0,7-1,4	1.606.1203.71
NPT 3/4"	25	16,9-26	20	16,4	20,5	81,3	36	42	25	0-0,7	0,9-1,6	1.606.3403.70
NPT 1"	32	22-33	26	21,4	25	85,5	46	52	45	0-0,7	1,3-2,0	1.606.1003.70
NPT 1 1/4"	40	28-41	33,2	27,6	26	94,4	55	64	70	0-0,7	1,3-2,0	1.606.5403.70
NPT 1 1/2"	40	28-41	33,2	27,6	26,5	94,4	55	64	70	0-0,7	1,3-2,0	1.606.6403.70
NPT 2"	50	36-52,6	44,2	37,5	27	116,3	65	73	85	0-1,0	1,5-2,5	1.606.2003.70
NPT 2 1/2"	63	46-65,3	56,2	47,3	40	127,6	80	90	120	0-1,0	1,5-2,5	1.606.5203.70
NPT 3"	75	57-78	68,2	58,0	41,5	136,5	95	107	150	0-1,0	1,5-2,5	1.606.3003.70