

PA 塑料配件

PoleonFit



材质 PA 尼龙塑料


防护等级 IP 55


温度环境 -30 °C – 80 °C (-22 °F – 176 °F)

颜色 灰 (RAL 7031), 黑 (RAL 9005)

注:
- 原材料符合 UL 94

RoHS




尺寸	d mm	D mm	GL mm	H mm	 mm	适配	订货号 灰	订货号 黑
M 12	6,9	18,7	11	26	15	6	1.533.1200.50	1.533.1201.50
M 16	10,8	21,7	11	26	18	10	1.533.1600.51	1.533.1601.51
M 16	10,9	26	11	26,5	20	12	1.533.1600.50	1.533.1601.50
M 20	14,7	28	11	31	23	14	1.533.2000.51	1.533.2001.51
M 20	15,2	32	13	33	27	17	1.533.2000.50	1.533.2001.50
M 25	18,7	39,5	16	39	34	23	1.533.2500.50	1.533.2501.50
M 32	25,7	46,5	16	43	40	29	1.533.3200.50	1.533.3201.50
M 40	32,7	55,5	16	45,5	50	37	1.533.4000.50	1.533.4001.50
M 50	51,4	67,5	16	47,5	62	50	1.533.5000.50	1.533.5001.50
PG 7	6,9	18,7	11	26	15	6	1.533.0700.14	1.533.0701.14
PG 9	10,3	21,7	11	26	18	10	1.533.0900.14	1.533.0901.14
PG 11	13,3	26	11	26,5	20	12	1.533.1100.14	1.533.1101.14
PG 13,5	15,3	28	11	31	23	14	1.533.1300.14	1.533.1301.14
PG 16	16,6	32	13	33	27	17	1.533.1600.14	1.533.1601.14
PG 21	22,3	39,5	16	39	34	23	1.533.2100.14	1.533.2101.14
PG 29	31,7	46,5	16	43	40	29	1.533.2900.14	1.533.2901.14
PG 36	40,5	55,5	16	45,5	50	37	1.533.3600.14	1.533.3601.14
PG 48	51,7	67,5	16	47,5	62	50	1.533.4800.14	1.533.4801.14

RoHS


颜色 灰 (RAL 7031), 黑 (RAL 9005)

A black, L-shaped industrial connector. It features a large, circular, flanged opening on one end and a threaded port on the other. The body is robust and appears to be made of a dark plastic or metal. The background is a light blue gradient.

保留改变尺寸结构的权利

PA 塑料配件

PoleonFit Clip

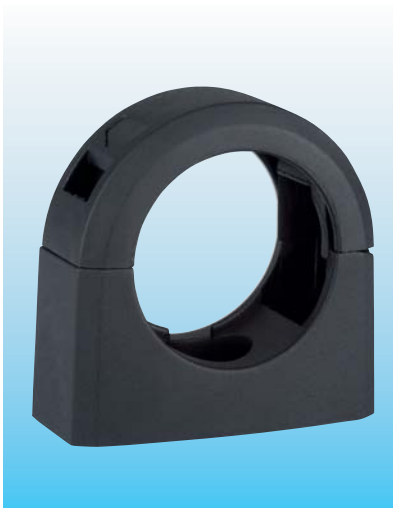

材质


塑料

环境温度

-30 °C – 80 °C (-58 °F – 248 °F)


颜色

黑

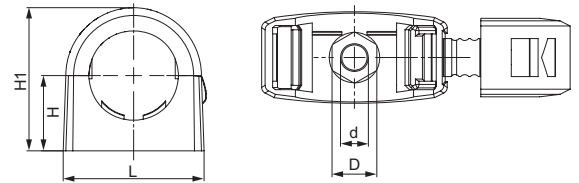

尺寸	d mm	D mm	L mm	H mm	H1 mm	适配	订货号 黑
DN10	4,2	7,5	22,6	12,9	23,3	10	1.534.0901.00
DN12	4,2	7,5	22,6	12,9	23,3	12	1.534.1101.00
DN17	5,1	8,8	26,7	15,1	26,9	17	1.534.1601.00
DN23	6,1	10,4	33,8	19,1	34	23	1.534.2101.00
DN29	6,1	10,3	43,8	23,4	43,7	29	1.534.2901.00
DN37	6,2	10,2	52,8	26,9	51,6	37	1.534.3601.00
DN50	6,2	10,2	81	38,5	77	50	1.534.4801.00

颜色 黑




尺寸	L mm	H mm	适配	订货号 黑
DN10	50	68,5	10	1.536.0901.00
DN12	50,5	69,5	12	1.536.1101.00
DN17	58	80	17	1.536.1601.00
DN23	71	95	23	1.536.2101.00
DN29	84	109	29	1.536.2901.00

PA 塑料配件

PoleonFit Y



材质	PA 尼龙塑料
防护等级	IP 66
温度环境	-40 °C – 120 °C (-40 °F – 248 °F)
颜色	黑



尺寸	d mm	D mm	A mm	H mm	H1 mm	L mm	适配	订货号 黑
DN10/06/06*	5	21,2	21	32,7	69,3	28,2	10/06/06	1.537.0901.00
DN12/10/10	5,5	22,3	25	31	74	42	12/10/10	1.537.1101.00
DN17/12/12	6,5	28	32	32	85	51	17/12/12	1.537.1601.00
DN23/17/17	6,5	36,4	38	38	90,5	63,8	23/17/17	1.537.2101.00
DN29/23/23	6,5	43	45	37	106	76,8	29/23/23	1.537.2901.00
DN37/29/29*	6,5	52,5	53,5	48,3	125,7	95,9	37/29/29	1.537.3601.00
DN50/37/37*	6,5	66,5	64	53	129	109,4	50/37/37	1.537.4801.00

* 请垂询

PoleonFit N

Metr., PG, NPT





材质 PA 尼龙塑料

防护等级 IP 54, O 型圈
固定软管安装 IP 65

温度环境 -20 °C – 80 °C (-4 °F – 176 °F)

颜色 灰 (RAL 7031), 黑 (RAL 9005)



尺寸	D mm	GL mm	H mm	 mm	适配	订货号 灰	订货号 黑
M 16 x 1,5	20	8	23	17	10	1.511.1600.50	1.511.1601.50
M 20 x 1,5	26,5	9	28	24	14	1.511.2000.50	1.511.2001.50
M 25 x 1,5	38,5	11	32	35	23	1.511.2500.50	1.511.2501.50
M 32 x 1,5	46	11	35	42	29	1.511.3200.50	1.511.3201.50
PG 9	19	8	23	17	10	1.511.0900.14	1.511.0901.14
PG 11	23	8	25	21	12	1.511.1100.14	1.511.1101.14
PG 13,5	26,5	9	28	24	14	1.511.1300.14	1.511.1301.14
PG 16	30	10	29	27	17	1.511.1600.14	1.511.1601.14
PG 21	38,5	11	32	35	23	1.511.2100.14	1.511.2101.14
PG 29	46	11	35	42	29	1.511.2900.14	1.511.2901.14
PG 36	54,5	13	41	50	37	1.511.3600.14	1.511.3601.14
PG 48	70	14	46	64	50	1.511.4800.14	1.511.4801.14
NPT 3/8"	19	15	23	17	10	1.511.3800.70	1.511.3801.70
NPT 1/2"	30	13	29	27	17	1.511.1216.70	1.511.1217.70
NPT 3/4"	38,5	13	32	35	23	1.511.3400.70	1.511.3401.70
NPT 1"	46	15	35	42	29	1.511.1000.70	1.511.1001.70

PA 塑料配件

PoleonFit W

Metr., PG, NPT




材质 PA 尼龙塑料


O 型圈 丁晴橡胶

防护等级 IP 54
固定软管安装 IP 65

温度环境 -20 °C – 80 °C (-4 °F – 176 °F)

颜色 黑 (RAL 9005)



尺寸	D mm	GL mm	H mm	L mm	 mm	适配	订货号 黑
M 16 x 1,5	20	8	23	43	19	10	1.513.1601.50
M 20 x 1,5	26,5	9	30,5	52	24	14	1.513.2001.50
M 25 x 1,5	38,5	11	40	70	33	23	1.513.2501.50
M 32 x 1,5	46	11	51,5	83	42	29	1.513.3201.50
PG 9	19	8	23	43	19	10	1.513.0901.14
PG 11	23	8	27	48	22	12	1.513.1101.14
PG 13,5	26,5	9	30,5	52	24	14	1.513.1301.14
PG 16	30	10	32,5	56	27	17	1.513.1601.14
PG 21	38,5	11	40	70	33	23	1.513.2101.14
PG 29	46	11	51,5	83	42	29	1.513.2901.14
NPT 3/8"	19	15	23	43	19	10	1.513.3801.70
NPT 1/2"	30	13	32,5	56	27	17	1.513.1217.70
NPT 3/4"	38,5	13	40	70	33	23	1.513.3401.70
NPT 1"	46	15	51,5	83	42	29	1.513.1001.70

PoleonFit DUO-MS

Metr., PG, NPT




材质 黄铜镀镍

夹字件 PA 尼龙塑料

密封件 丁晴橡胶

防护等级 IP 68 – 10 bar/ IP 69K (NEMA 6 – 150 PSIG)
在电缆接头端

温度环境 - 40 °C – 100 °C (- 40 °F – 212 °F)



尺寸	Ø mm	GL mm	H mm	D mm	mm	适配	订货号
M16	05–10	6	36	23	20/20	10	1.547.1610.50
M16	03–07	6	36	23	20/20	10	1.547.1610.51
M20	10–14	6	39,5	25	24/22	12	1.547.2012.50
M20	07–12	6	39,5	25	24/22	12	1.547.2012.51
M20	10–14	6	40,5	29	28/24	14	1.547.2014.50
M20	07–12	6	40,5	29	28/24	14	1.547.2014.51
M25	13–18	7	44,5	30	30/30	17	1.547.2517.50
M25	09–16	7	44,5	30	30/30	17	1.547.2517.51
M32	18–24	8	50,5	39	40/40	23	1.547.3223.50
M32	13–20	8	50,5	39	40/40	23	1.547.3223.51
M40	22–31	8	56,5	45	50/50	29	1.547.4029.50
M40	20–26	8	56,5	45	50/50	29	1.547.4029.51
M50	32–36	9	57,5	52	57/57	37	1.547.5037.50
M50	25–31	9	57,5	52	57/57	37	1.547.5037.51
M63	37–44	10	60,5	52	64/64	50	1.547.6350.50
M63	29–35	10	60,5	52	64/64	50	1.547.6350.51
PG11	05–10	6	36	23	20/20	10	1.548.1110.01
PG11	03–07	6	36	23	20/20	10	1.548.1110.15
PG13,5	6–12	6,5	39,5	25	24/22	12	1.548.1312.01
PG13,5	5–9	6,5	39,5	25	24/22	12	1.548.1312.15
PG16	10–14	6,5	40,5	29	28/24	14	1.548.1614.01
PG16	07–12	6,5	40,5	29	28/24	14	1.548.1614.15
PG21	13–16	7	44,5	30	30/30	17	1.548.2117.01
PG21	09–16	7	44,5	30	30/30	17	1.548.2117.15
PG29	18–22	8	50,5	39	40/40	23	1.548.2923.01
PG29	13–20	8	50,5	39	40/40	23	1.548.2923.15
PG36	22–28	8	56,5	45	50/50	29	1.548.3629.01
PG36	20–26	8	56,5	45	50/50	29	1.548.3629.15
PG42	32–36	9	57,5	52	57/57	37	1.548.4237.01
PG42	25–31	9	57,5	52	57/57	37	1.548.4237.15
PG48	37–44	10	60,5	52	64/64	50	1.548.4850.01
PG48	29–35	10	60,5	52	64/64	50	1.548.4850.15

PA 塑料配件

PoleonFit DUO-PA

Metr., PG, NPT




材质 黄铜镀镍

密封件 丁晴橡胶

防护等级 IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
在电缆接头端

温度环境 -40 °C – 100 °C (-40 °F – 212 °F)

颜色 黑 (RAL 9005)



尺寸	Ø mm	GL mm	H mm	D mm	mm	适配	订货号 黑
M16	05–10	8	40	23	22	10	1.542.1610.50
M16	03–07	8	40	23	22	10	1.542.1610.51
M20	06–12	10	44	25	24	12	1.542.2012.50
M20	05–09	10	44	25	24	12	1.542.2012.51
M20	10–14	10	46	29	27	14	1.542.2014.50
M20	07–12	10	46	29	27	14	1.542.2014.51
M25	13–18	11	50	30	33	17	1.542.2517.50
M25	09–16	11	50	30	33	17	1.542.2517.51
M32	18–24	11	60	39	42	23	1.542.3223.50
M32	13–20	11	60	39	42	23	1.542.3223.51
M40	22–31	13	69	45	53	29	1.542.4029.50
M40	20–26	13	69	45	53	29	1.542.4029.51
M50	32–36	13	74	52	60	37	1.542.5037.50
M50	25–31	13	74	52	60	37	1.542.5037.51
M63	37–44	14	79	52	68	50	1.542.6350.50
M63	29–35	14	79	52	68	50	1.542.6350.51
PG11	05–10	8	40	23	22	10	1.543.1110.14
PG11	03–07	8	40	23	22	10	1.543.1110.15
PG13,5	06–12	9	44	25	24	12	1.543.1312.14
PG13,5	05–09	9	44	25	24	12	1.543.1312.15
PG16	10–14	10	47	29	27	14	1.543.1614.14
PG16	07–12	10	47	29	27	14	1.543.1614.15
PG21	13–16	11	50	30	33	17	1.543.2117.14
PG21	09–16	11	50	30	33	17	1.543.2117.15
PG29	18–22	11	60	39	42	23	1.543.2923.14
PG29	13–20	11	60	39	42	23	1.543.2923.15
PG36	22–31	13	69	45	53	29	1.543.3629.14
PG36	20–26	13	69	45	53	29	1.543.3629.15
PG42	32–36	13	74	52	60	37	1.543.4237.14
PG42	25–31	13	74	52	60	37	1.543.4237.15
PG48	37–44	14	79	52	68	50	1.543.6350.14
PG48	29–35	14	79	52	68	50	1.543.6350.15

R-M-PA




Metr., PG



材质 PA 尼龙塑料 (Type A/Type B),
聚丙烯 (Type A/Type B)

环境温度 - 20 °C – 80 °C (-4°F – 176°F)

颜色 黑 (RAL 9005)



尺寸	IG mm	Type	d mm	GL mm	H mm	U mm	订货号 黑
M 16 x 1,5	M 12 x 1,5	B	10	8	6	20	1.273.1612.50
M 20 x 1,5	M 16 x 1,5	B	13,5	8	6	25	1.273.2016.50
M 25 x 1,5	M 20 x 1,5	B	18	8	6	29	1.273.2520.50
M 32 x 1,5	M 25 x 1,5	B	23	10	6	36	1.273.3225.50
M 40 x 1,5	M 32 x 1,5	C	30	15	5		1.273.4032.50
M 50 x 1,5	M 40 x 1,5	C	38	15	5		1.273.5040.50
M 63 x 1,5	M 50 x 1,5	C	48	15	5		1.273.6350.50
M 25 x 1,5	PG 13,5	B	18	8	6	29	1.273.2513.50
M 25 x 1,5	PG 16	A	18	8	14	29	1.273.2516.50
M 32 x 1,5	PG 21	A	25	10	15	36	1.273.3221.50
M 40 x 1,5	PG 29	A	33	10	15	45	1.273.4029.50
M 50 x 1,5	PG 36	A	43	12	17	55	1.273.5036.50
M 63 x 1,5	PG 42	C	52	15	5		1.273.6342.50
PG 9	M 12 x 1,5	C	15	19	8,5		1.273.0912.11
PG 11	M 16 x 1,5	C	15	19	11,5		1.273.1116.11
PG 13,5	M 16 x 1,5	B	25	8	6	14	1.273.1316.11
PG 16	M 20 x 1,5	A	27	8	13	16	1.273.1620.11
PG 21	M 25 x 1,5	C	15	19	20,5		1.273.2125.11
PG 29	M 32 x 1,5	C	15	19	28		1.273.2932.11
PG 36	M 40 x 1,5	C	15	5	38		1.273.3640.11
PG 42	M 40 x 1,5	C	15	5	38		1.273.4240.11
PG 48	M 50 x 1,5	C	15	5	38		1.273.4850.11




Accessories Polyamide

E-M-PA, K-FS

Metr., PG



材质	PA 尼龙塑料 (Type A/Type B), 聚丙烯 (Type C)
环境温度	-20 °C – 80 °C (-4 °F – 176 °F)
颜色	K-FS 灰 (RAL 7035), E-M-PA 黑 (RAL 9005)



尺寸	IG mm	Type	d mm	GL mm	H mm	U mm	订货号
M 12 x 1,5	M 16 x 1,5	A	6,5	8	12	21	1.239.1216.50
M 16 x 1,5	M 20 x 1,5	A	9	8	13	25	1.239.1620.50
M 20 x 1,5	M 25 x 1,5	A	14	8	15	30	1.239.2025.50
M 25 x 1,5	M 32 x 1,5	C	16,5	15	15		1.239.2532.50
M 32 x 1,5	M 40 x 1,5	C	23	15	19,5		1.239.3240.50
M 40 x 1,5	M 50 x 1,5	C	30	15	19,5		1.239.4050.50
M 50 x 1,5	M 63 x 1,5	C	39	15	20		1.239.5063.50
M 12 x 1,5	PG 7	A	6,5	8	12	17	1.239.1207.50
M 16 x 1,5	PG 9	C	8,5	1	19		1.239.1609.50
M 20 x 1,5	PG 13,5	A	14	8	13	25	1.239.2013.50
M 63 x 1,5	PG 48	C	51	15	20		1.239.6348.50
PG 7	M 12 x 1,5	C	6	15	19		1.239.0712.11
PG 9	M 16 x 1,5	A	9	8	12	21	1.239.0916.11
PG 11	M 20 x 1,5	C	11,5	15	19		1.239.1120.11
PG 13,5	M 20 x 1,5	A	14	8	13	25	1.239.1320.11
PG 16	M 25 x 1,5	A	16	8	15	30	1.239.1625.11
PG 21	M 32 x 1,5	A	21	8	15	37	1.239.2132.11
PG 29	M 40 x 1,5	A	30	10	17	45	1.239.2940.11
PG 36	M 50 x 1,5	C	37	15	19,5		1.239.3650.11
PG 42	M 50 x 1,5	C	43	15	19,5		1.239.4250.11
PG 48	M 63 x 1,5	C	48	15	20		1.239.4863.11
PG 11	PG 13,5	B	12,5	8	15	24	1.233.1113.11
PG 13,5	PG 16	B	15	9	16	27	1.233.1316.11
PG 16	PG 21	B	16	10	19	32	1.233.1621.11
PG 21	PG 29	B	22,5	11	21	42	1.233.2129.11

Accessories Polyamide

GM-FS

Metr., PG, NPT






材质 PA 尼龙塑料, V0 等级, 参照 UL 94

环境温度 -40 °C – 100 °C (-40 °F – 212 °F)

颜色 灰 (RAL 7035), 黑 (RAL 9005)

建议:
– 其他颜色请垂询

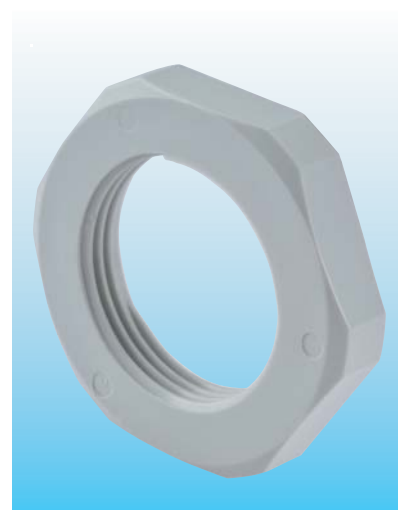

IG	H mm	 mm	订货号 PA V0 灰	订货号 PA V0 黑
M 12 x 1,5	5	17	1.262.1200.50	1.262.1201.50
M 16 x 1,5	5	22	1.262.1600.50	1.262.1601.50
M 20 x 1,5	6	27	1.262.2000.50	1.262.2001.50
M 25 x 1,5	6,5	32	1.262.2500.50	1.262.2501.50
M 32 x 1,5	7	41	1.262.3200.50	1.262.3201.50
M 40 x 1,5	7	50	1.262.4000.50	1.262.4001.50
M 50 x 1,5	8	60	1.262.5000.50	1.262.5001.50
M 63 x 1,5	8	75	1.262.6300.50	1.262.6301.50
PG 7	5	19	1.262.0700.11	1.262.0701.11
PG 9	5	22	1.262.0900.11	1.262.0901.11
PG 11	5	24	1.262.1100.11	1.262.1101.11
PG 13,5	6	27	1.262.1300.11	1.262.1301.11
PG 16	6	30	1.262.1600.11	1.262.1601.11
PG 21	7	36	1.262.2100.11	1.262.2101.11
PG 29	7	46	1.262.2900.11	1.262.2901.11
PG 36	8	60	1.262.3600.11	1.262.3601.11
PG 42	8	65	1.262.4200.11	1.262.4201.11
PG 48	8	70	1.262.4800.11	1.262.4801.11
NPT 3/8"	7	24	1.262.3800.70	1.262.3801.70
NPT 1/2"	6	27	1.262.1200.70	1.262.1201.70
NPT 3/4"	7	32	1.262.3400.70	1.262.3401.70
NPT 1"	7	40	1.262.1000.70	1.262.1001.70