



Meleon Pro A



材质	镀锌钢,PVC 覆层
防护等级	IP 66
环境温度	-20 °C – 105 °C (-4 °F – 221 °F)



尺寸 DN	d mm	D mm		订货号
10	10,3	16	40	1.562.1061.00
12	12,3	18	45	1.562.1261.00
16	15,5	21	65	1.562.1661.00
21	20,9	26,5	100	1.562.2161.00
27	26,5	33,3	135	1.562.2761.00
35	35	42	175	1.562.3561.00
40	40	48,2	230	1.562.4061.00
51	51,5	60	280	1.562.5161.00


Meleon Pro B

RoHS

材质 镀锌钢 / 不锈钢 (304)

防护等级 IP 40


环境温度 -100 °C – 300 °C (-148 °F – 572 °F)




尺寸 DN	d mm	D mm	R mm	订货号
镀锌钢				
9	9	14	30	1.563.0960.00
11	11	16	35	1.563.1160.00
13	13	17,5	40	1.563.1360.00
16	16	21	45	1.563.1660.00
21	21	26	55	1.563.2160.00
26	26	32	70	1.563.2660.00
35	35	41	80	1.563.3560.00
40	40	46	90	1.563.4060.00
51	51	57	90	1.563.5160.00
不锈钢 (304)				
10	10	15.5	30	1.563.0960.11
13	12.5	17.5	40	1.563.1360.11
15	15.5	21.5	45	1.563.1660.11
20	20	26.8	55	1.563.2160.11
25	25	33.5	70	1.563.2660.11
32	32	42	80	1.563.3560.11
38	38	48.2	90	1.563.4060.11
51	51	61.3	90	1.563.5160.11

材质	镀锌钢
防护等级	IP 65
环境温度	- 15 °C – 70 °C (5°F – 158°F)

RoHS



尺寸 DN	d mm	D mm		订货号
9	9	15	30	1.564.0960.00
11	11	17	35	1.564.1160.00
13	13	18,5	40	1.564.1360.00
16	16	22	45	1.564.1660.00
21	21	27	55	1.564.2160.00
26	26	33	70	1.564.2660.00
35	35	42	80	1.564.3560.00
40	40	47	90	1.564.4060.00
51	51	58	90	1.564.5160.00


MeleonFit Pro



RoHS

材质 黄铜镀镍

防护等级 IP 67

环境温度 -20 °C – 100 °C (-4 °F – 176 °F)



尺寸	d mm	D mm	GL mm	H mm	 mm	 mm	适配 Meleon Pro A/Meleon Pro B, C	订货号
M 12	16,5	24,5	10		20	22	09/10	1.572.1260.50
M 16	19	29,2	10	35	24	26	11/12	1.572.1660.51
M 16	22	32,6	11,5	39	27	29	12/13	1.572.1660.50
M 20	22	32,6	13	38,7	27	29	16	1.572.2060.50
M 25	27,5	38,8	15	41	33	35	20/21	1.572.2560.50
M 32	34,5	50	15	49	43	45	25/26/27	1.572.3260.50
M 40	43,5	60	16	51	52	54	33/35	1.572.4060.50
M 50	49,5	69,3	18	61	60	63	38/ 40	1.572.5060.50
M 63	62	85	20	73	74	77	51	1.572.6360.50
PG 7			10		20	22	09/10	1.572.0760.14
PG 9	16,5	24,5	10		20	22	11/12	1.572.0960.14
PG 11	19	29,2	11,5	35	24	26	12/13	1.572.1160.14
PG 13,5	22	32,6	13	39	27	29	16	1.572.1360.14
PG 16	22	32,6	13	38,7	27	29	16	1.572.1660.14
PG 21	27,5	38,8	15	41	33	35	21	1.572.2160.14
PG 29	34,5	50	15	49	43	45	26/27	1.572.2960.14
PG 36	43,5	60	16	51	52	54	35	1.572.3660.14
PG 42	49,5	69,3	18	61	60	63	40	1.572.4260.14
PG 48	62	85	20	73	74	77	51	1.572.4860.14

金属配件

MeleonFit Pro S




材质 黄铜镀镍

防护等级 IP 67

环境温度 -20 °C – 100 °C (-4 °F – 176 °F)

RoHS




尺寸	d mm	D mm	GL mm	1 mm	2 mm	适配 Meleon Pro A/Meleon Pro B, C	订货号
M 12	16,5	24,5	10	20	22	09/10	1.573.1260.50
M 16	19	29,2	10	20	22	11/12	1.573.1660.51
M 16	22	32,6	11,5	24	26	12/13	1.573.1660.50
M 20	22	32,6	13	27	29	16	1.573.2060.50
M 25	27,5	38,8	15	33	35	20/21	1.573.2560.50
M 32	34,5	50	15	43	45	25/26/27	1.573.3260.50
M 40	43,5	60	16	52	54	33/ 35	1.573.4060.50
M 50	49,5	69,3	18	60	63	38/40	1.573.5060.50
M 63	62	85	20	74	77	51	1.573.6360.50
PG 7			10	20	22	09/10	1.573.0760.14
PG 9	16,5	24,5	10	20	22	11/12	1.573.0960.14
PG 11	19	29,2	11,5	24	26	12/13	1.573.1160.14
PG 13,5	22	32,6	13	27	29	16	1.573.1360.14
PG 16	22	32,6	13	27	29	16	1.573.1660.14
PG 21	27,5	38,8	15	33	35	21	1.573.2160.14
PG 29	34,5	50	15	43	45	26/27	1.573.2960.14
PG 36	43,5	60	16	52	54	35	1.573.3660.14
PG 42	49,5	69,3	18	60	63	40	1.573.4260.14
PG 48	62	85	20	74	77	51	1.573.4860.14

RoHS

保留改变尺寸结构的权利

金属配件

GM-Ms

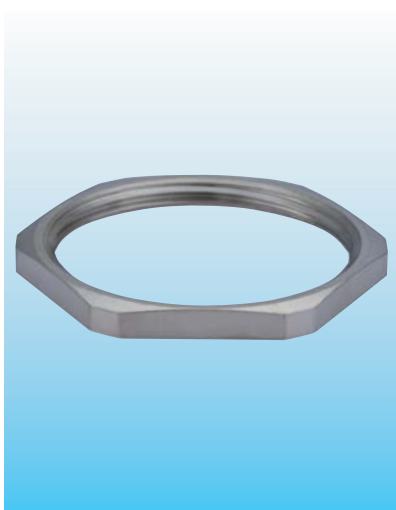

材质


黄铜镀镍


防护等级

IP 68 – 10 巴 / IP 69K
固定软管安装

环境温度

-40 °C – 100 °C (-40 °F – 212 °F)



尺寸	H mm	 mm	订货号
M 12 x 1,5	2,8	15	1.161.1200.50
M 16 x 1,5	2,8	19	1.161.1600.50
M 20 x 1,5	3,0	23	1.161.2000.50
M 25 x 1,5	3,5	29	1.161.2500.50
M 32 x 1,5	4,0	36	1.161.3200.50
M 40 x 1,5	4,5	45	1.161.4000.50
M 50 x 1,5	5,5	55	1.161.5000.50
M 63 x 1,5	6,0	70	1.161.6300.50
PG 7	2,8	15	1.161.0700.01
PG 9	2,8	18	1.161.0900.01
PG 11	3,0	21	1.161.1100.01
PG 13,5	3,0	23	1.161.1300.01
PG16	3,0	26	1.161.1600.01
PG 21	3,5	32	1.161.2100.01
PG 29	4,0	41	1.161.2900.01
PG 36	5,0	51	1.161.3600.01
PG 42	5,0	60	1.161.4200.01
PG 48	5,5	64	1.161.4800.01