


General Purpose AC/DC EMI Filter with High Attenuation Performance



- Rated currents from 1 to 30 A
- High performance filter attenuation
- High differential-mode attenuation
- Optional medical versions (B type)
- Optional safety versions (A type)
- Optional enhanced performance versions
- Optional overvoltage protection (Z type)




Performance indicators

Attenuation performance



Rated current [A]



Technical Specifications

| | |
|---|---|
| Rated voltage* | 250 VAC, 50/60 Hz 250 VDC |
| Operating frequency | DC to 400 Hz |
| Surge pulse protection (Z type) | Helps compliance to IEC61000-4-5 (Differential Mode only) |
| High potential test voltage | P -> N 1100 VDC for 2 sec P -> PE 2000 VAC for 2 sec (equiv. cap <88 nF) P -> PE 2550 VDC for 2 sec (equiv. cap >88 nF) P -> PE 2500 VAC for 2 sec (B types) |
| Temperature range (operation and storage) | -25°C to +100°C (25/100/21)** |
| Certified to | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939 (applies to AC and DC applications) |
| Flammability corresponding to | Laces for -07 version: UL 94 VW-1 Terminal plastic for -06/-08 version: UL 94 V-0 Grommet for -07 version: UL 94 V-0 |
| Overvoltage category | II acc. IEC 60664-1 |
| Pollution degree | 2 acc. IEC 60664-1 |
| Altitude | 2000m (above derating applies)** |
| Rated currents | 1 to 30 A @ 40°C max |

* maximum RMS operating voltage at rated frequency or the maximum DC operating voltage
** for dedicated requests exceeding this specification (e.g. -40 °C or higher altitude) please contact your local Schaffner Sales office

Approvals & Compliances




Features and Benefits

- FN 2030 filters are designed for easy and fast chassis mounting
- FN 2030 B versions without capacitors to earth comply to 1MOP for ME (medical equipment) acc. IEC 60601-1
- FN 2030 A versions with low capacitance to earth for safety critical applications with a requirement for low leakage currents
- FN 2030 filters offer an optimized filter range for high performance AC and DC applications , in same compact size (M, N1 types)
- All filters provide an exceptional conducted attenuation performance, based on chokes with high permeable core material and excellent thermal behavior
- The higher inductivity versus amperage offers increased attenuation performance with same form factor compared to FN 2010 and FN 2020 filter series
- All FN 2030 filters can be delivered with optional surge pulse protection (Z type).
- Various terminal options allow you to select the desired connection style




Typical Applications

- Electrical and electronic equipment
- Consumer goods
- Household equipment
- Medical equipment
- Electronic data processing equipment
- Office automation and datacom equipment
- Various noisy applications requiring high filter performance

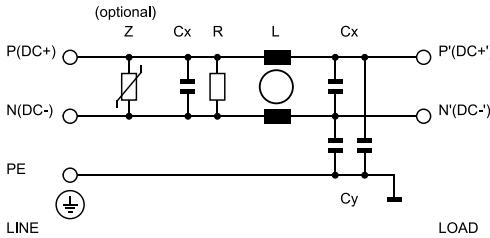Typical electrical schematic



Filter Selection Table

| Filter* | Buy | Rated current @ 40°C (25°C) | Leakage current** @ 250 VAC/50 Hz (@ 120 VAC/60 Hz) | Power Loss @25°C/DC | Inductance*** L | Capacitance*** | | Resistance*** R | Input/Output connections | | | Weight | |
|----------------------|-----|--------------------------------|---|------------------------|--------------------|----------------|------|--------------------|-----------------------------|---|---|--------|---|
| | | | | | | Cx | Cy | | R |  |  | |  |
| | | | | | | | | | | | | | |
| | | [A] | [mA] | [W] | [mH] | [μF] | [nF] | [kΩ] | | | | [g] | |
| FN2030-1-.. | | 1 (1.1) | 0.31 (0.18) | 0.9 | 20 | 0.22 | 2.2 | 1000 | -06 | -07 | | 58 | |
| FN2030-3-.. | | 3 (3.4) | 0.47 (0.27) | 2.2 | 14 | 0.33 | 3.3 | 1000 | -06 | -07 | | 87 | |
| FN2030-4-.. | | 4 (4.5) | 0.47 (0.27) | 2.9 | 14 | 0.33 | 3.3 | 1000 | -06 | -07 | | 92 | |
| FN2030-6-.. | | 6 (6.7) | 0.66 (0.38) | 3.2 | 8 | 0.47 | 4.7 | 680 | -06 | -07 | | 100 | |
| FN2030-8-.. | | 8 (8.9) | 0.66 (0.38) | 3.1 | 8 | 0.47 | 4.7 | 680 | -06 | -07 | | 170 | |
| FN2030-10-.. | | 10 (11.2) | 0.66 (0.38) | 5.3 | 8 | 0.47 | 4.7 | 680 | -06 | -07 | | 196 | |
| FN2030-12-.. | | 12 (13.4) | 0.79 (0.45) | 7.6 | 4 | 1.0 | 10 | 330 | -06 | -07 | | 185 | |
| FN2030-16-.. | | 16 (17.9) | 0.79 (0.45) | 6.1 | 4 | 1.0 | 10 | 330 | -06 | -07 | -08 | 225 | |
| FN2030-20-.. | | 20 (22.4) | 0.79 (0.45) | 4.6 | 4 | 1.0 | 10 | 330 | -06 | | -08 | 285 | |
| FN2030-30-08 | | 30 (33.5) | 0.79 (0.45) | 6.0 | 2 | 1.0 | 10 | 330 | | | -08 | 326 | |
| | | | | | | | | | | | | | |
| FN2030A-1-.. | | 1 (1.1) | 0.07 (0.04) | 0.9 | 20 | 0.22 | 0.47 | 1000 | -06 | -07 | | 58 | |
| FN2030A-3-.. | | 3 (3.4) | 0.07 (0.04) | 2.2 | 14 | 0.33 | 0.47 | 1000 | -06 | -07 | | 87 | |
| FN2030A-4-.. | | 4 (4.5) | 0.07 (0.04) | 2.9 | 14 | 0.33 | 0.47 | 1000 | -06 | -07 | | 92 | |
| FN2030A-6-.. | | 6 (6.7) | 0.07 (0.04) | 3.2 | 8 | 0.47 | 0.47 | 680 | -06 | -07 | | 100 | |
| FN2030A-8-.. | | 8 (8.9) | 0.07 (0.04) | 3.1 | 8 | 0.47 | 0.47 | 680 | -06 | -07 | | 170 | |
| FN2030A-10-.. | | 10 (11.2) | 0.07 (0.04) | 5.3 | 8 | 0.47 | 0.47 | 680 | -06 | -07 | | 196 | |
| FN2030A-12-.. | | 12 (13.4) | 0.07 (0.04) | 7.6 | 4 | 1.0 | 0.47 | 330 | -06 | -07 | | 185 | |
| FN2030A-16-.. | | 16 (17.9) | 0.07 (0.04) | 6.1 | 4 | 1.0 | 0.47 | 330 | -06 | -07 | -08 | 225 | |
| FN2030A-20-.. | | 20 (22.4) | 0.07 (0.04) | 4.6 | 4 | 1.0 | 0.47 | 330 | -06 | | -08 | 285 | |
| FN2030A-30-08 | | 30 (33.5) | 0.07 (0.04) | 6.0 | 2 | 1.0 | 0.47 | 330 | | | -08 | 326 | |
| | | | | | | | | | | | | | |
| FN2030B-1-.. | | 1 (1.1) | 0.00 | 0.9 | 20 | 0.22 | | 1000 | -06 | -07 | | 58 | |
| FN2030B-3-.. | | 3 (3.4) | 0.00 | 2.2 | 14 | 0.33 | | 1000 | -06 | -07 | | 87 | |
| FN2030B-4-.. | | 4 (4.5) | 0.00 | 2.9 | 14 | 0.33 | | 1000 | -06 | -07 | | 92 | |
| FN2030B-6-.. | | 6 (6.7) | 0.00 | 3.2 | 8 | 0.47 | | 680 | -06 | -07 | | 100 | |
| FN2030B-8-.. | | 8 (8.9) | 0.00 | 3.1 | 8 | 0.47 | | 680 | -06 | -07 | | 170 | |
| FN2030B-10-.. | | 10 (11.2) | 0.00 | 5.3 | 8.45 | 0.47 | | 680 | -06 | -07 | | 196 | |
| FN2030B-12-.. | | 12 (13.4) | 0.00 | 7.6 | 4 | 1.0 | | 330 | -06 | -07 | | 185 | |
| FN2030B-16-.. | | 16 (17.9) | 0.00 | 6.1 | 4 | 1.0 | | 330 | -06 | -07 | -08 | 225 | |
| FN2030B-20-.. | | 20 (22.4) | 0.00 | 4.6 | 4 | 1.0 | | 330 | -06 | | -08 | 285 | |
| FN2030B-30-08 | | 30 (33.5) | 0.00 | 6.0 | 2 | 1.0 | | 330 | | | -08 | 326 | |
| | | | | | | | | | | | | | |
| Enhanced performance | | | | | | | | | | | | | |
| FN2030N1-1-06 | | 1 (1.1) | 5.34 (3.08) | 0.9 | 20 | 0.22 | 68 | 1000 | -06 | | | 65 | |
| FN2030M-3-06 | | 3 (3.4) | 3.69 (2.28) | 2.2 | 14 | 0.33 | 47 | 1000 | -06 | | | 110 | |
| FN2030M-4-06 | | 4 (4.5) | 3.69 (2.28) | 2.9 | 14 | 0.33 | 47 | 1000 | -06 | | | 110 | |
| FN2030M-6-06 | | 6 (6.7) | 3.69 (2.28) | 3.2 | 8 | 0.47 | 47 | 680 | -06 | | | 120 | |
| FN2030N1-8-06 | | 8 (8.9) | 5.34 (3.08) | 3.1 | 8 | 0.47 | 68 | 3680 | -06 | | | 200 | |
| FN2030N1-10-06 | | 10 (11.2) | 5.34 (3.08) | 5.3 | 8 | 0.47 | 68 | 680 | -06 | | | 200 | |
| FN2030N1-12-06 | | 12 (13.4) | 5.34 (3.08) | 7.6 | 4 | 1.0 | 68 | 330 | -06 | | | 210 | |
| FN2030M-16-.. | | 16 (17.9) | 3.69 (2.28) | 6.1 | 4 | 1.0 | 47 | 330 | -06 | | -08 | 265 | |
| FN2030M-20-.. | | 20 (22.4) | 3.69 (2.28) | 4.6 | 4 | 1.0 | 47 | 330 | -06 | | -08 | 326 | |
| FN2030M-30-08 | | 30 (33.5) | 3.69 (2.28) | 6.0 | 2 | 1.0 | 47 | 330 | | | -08 | 346 | |


* To compile a complete part number, please replace the -.. with the required I/O connection style. For surge pulse protection, please add Z (e.g. FN 2030Z-10-06, FN 2030BZ-20-08).

** Maximum leakage under usual AC operating conditions (acc. IEC60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


*** Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%

Typical Filter Attenuation


Per CISPR 17: symmetrical 50 Ω /50 Ω -> Differential Mode (DM); asymmetrical 50 Ω /50 Ω -> Common Mode (CM)

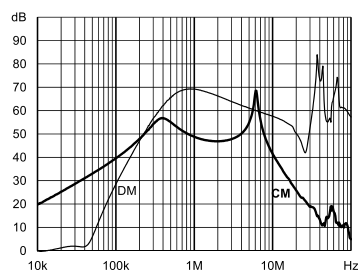


1 A: Standard type

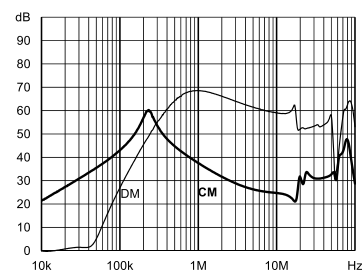


A type

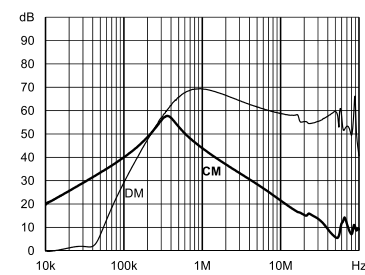


B type

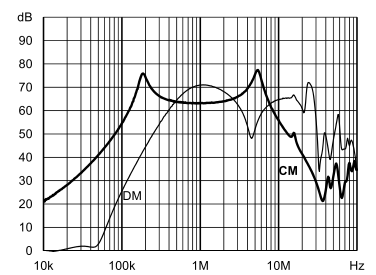


Enhanced performance

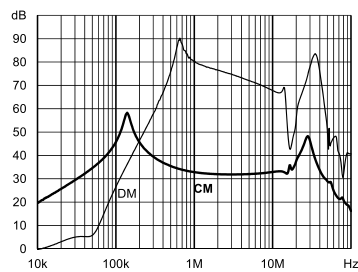


3 A: Standard type

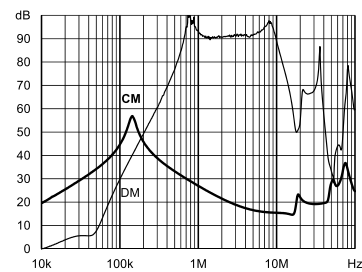


A type

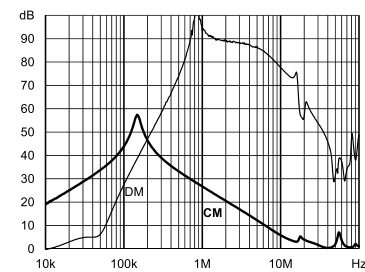


B type

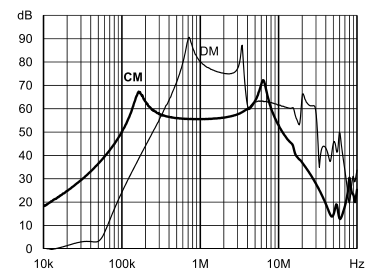


Enhanced performance

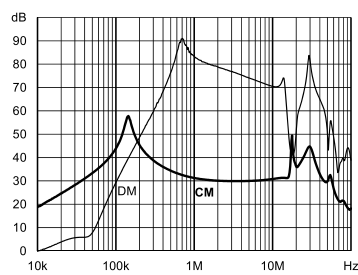


4 A: Standard type

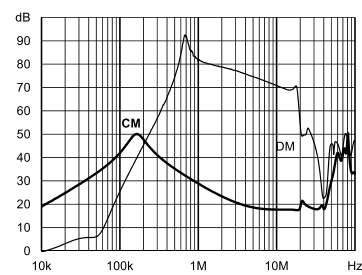


A type

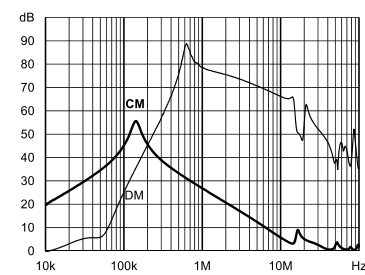


B type

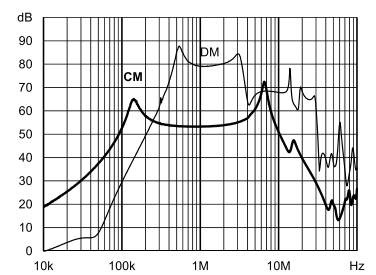


Enhanced performance

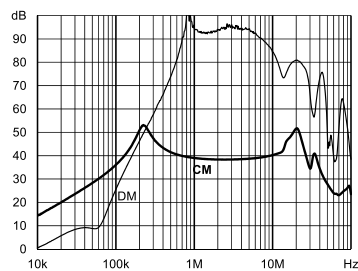


6 A: Standard type

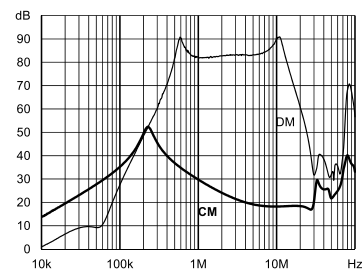


A type

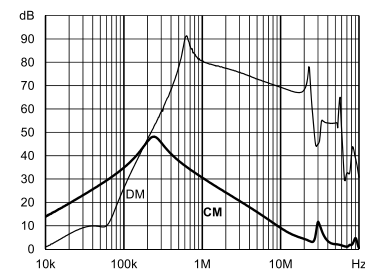


B type

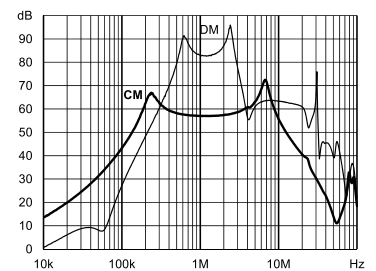


Enhanced performance

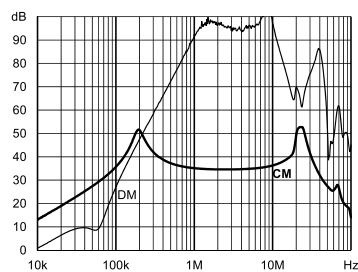


8 A: Standard type

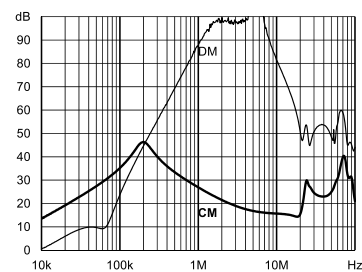


A type

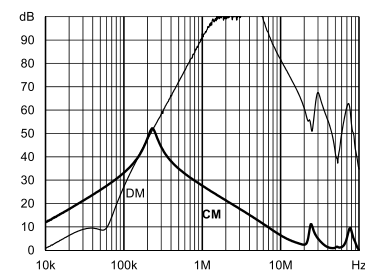


B type

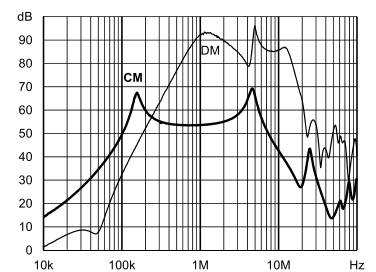


Enhanced performance

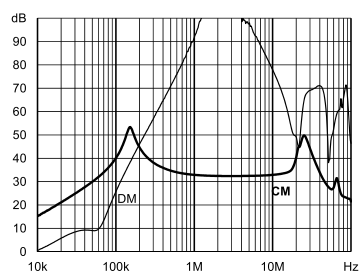



A type

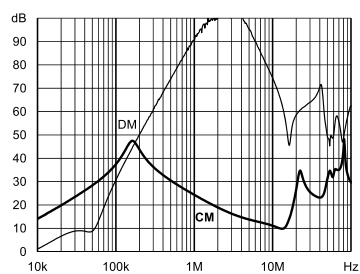


B type

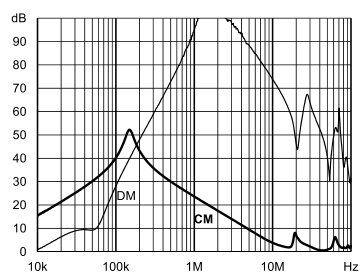


Enhanced performance

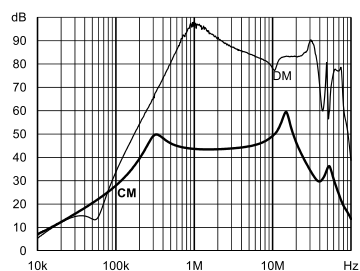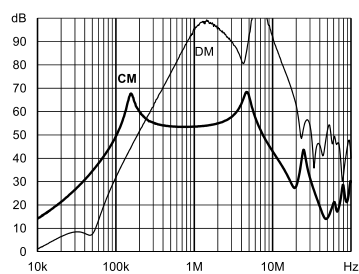



A type

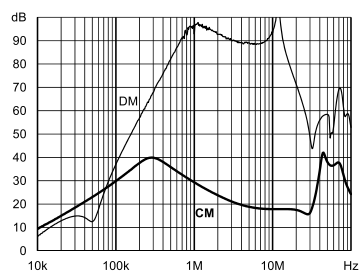


B type

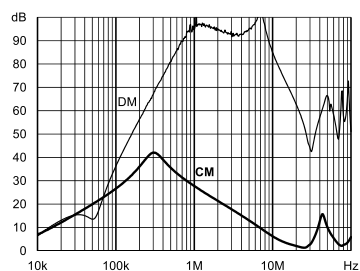


Enhanced performance

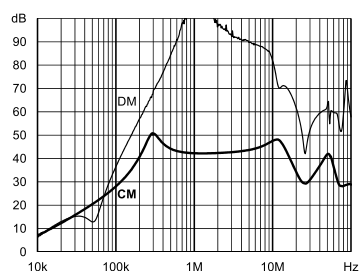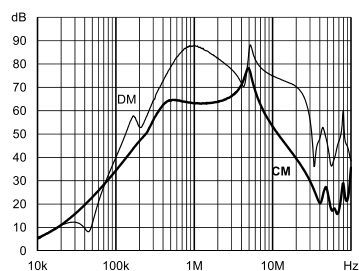



A type

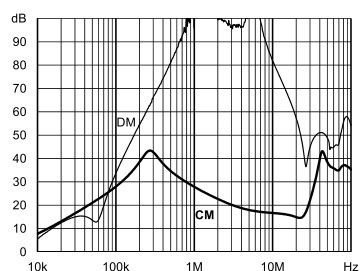


B type

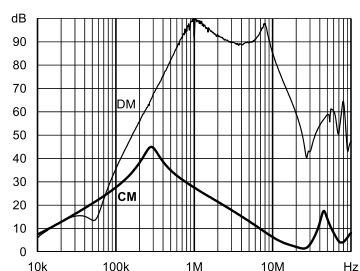


Enhanced performance

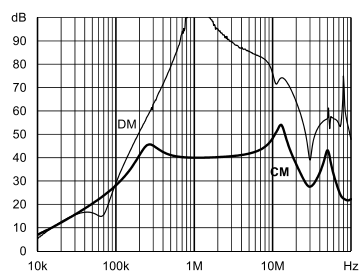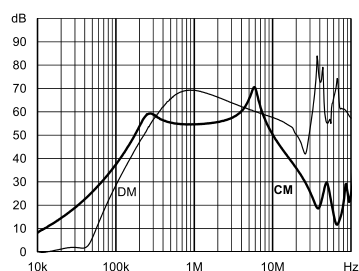



A type

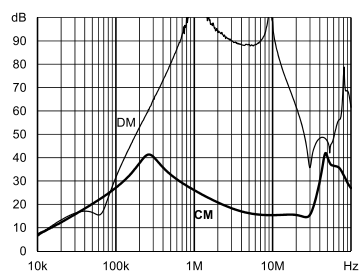


B type

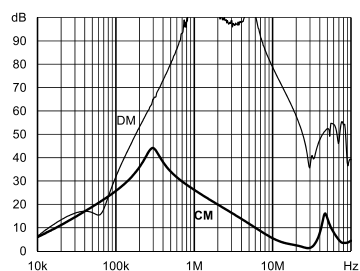


Enhanced performance

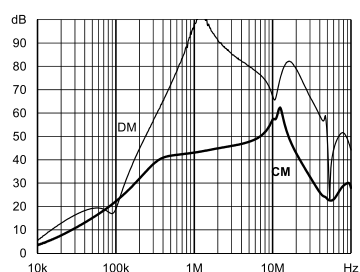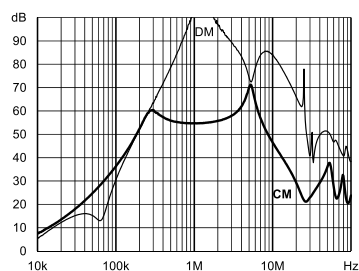


A type

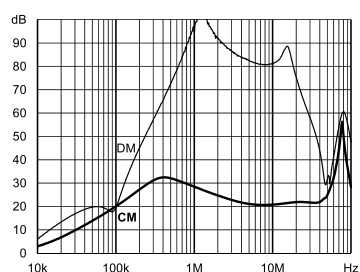

B type

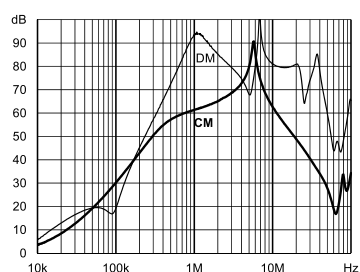


Enhanced performance

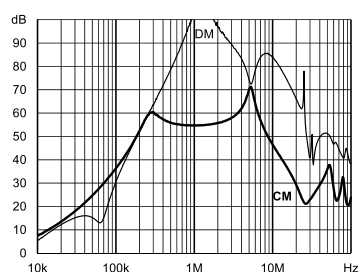

Product Selector


FN 2030 xy-xx-yy




| | |
|---------|---------------------------------------|
| 06 | Faston 6.3 × 0.8 mm (spade/soldering) |
| 07 | Wire leads |
| 08 | Studs (M4 screws) |
| 1 to 60 | Rated current |
| Blank | Standard version |
| Z | With surge protection |
| Blank | Standard version |
| A | Safety version |
| B | Medical version |
| N1/M | High performance version |

Mechanical data


Connection style -06, 1 A types

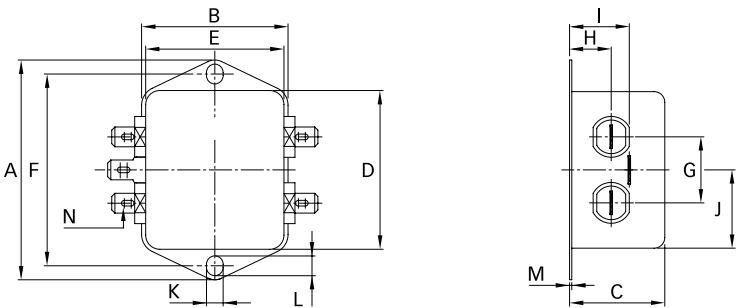

Connection style -06, 8 to 20 A types

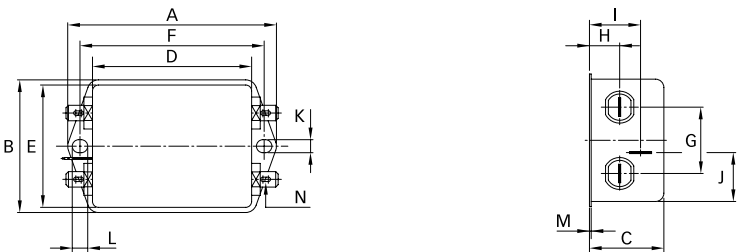


Connection style -06, 3 to 6 A types

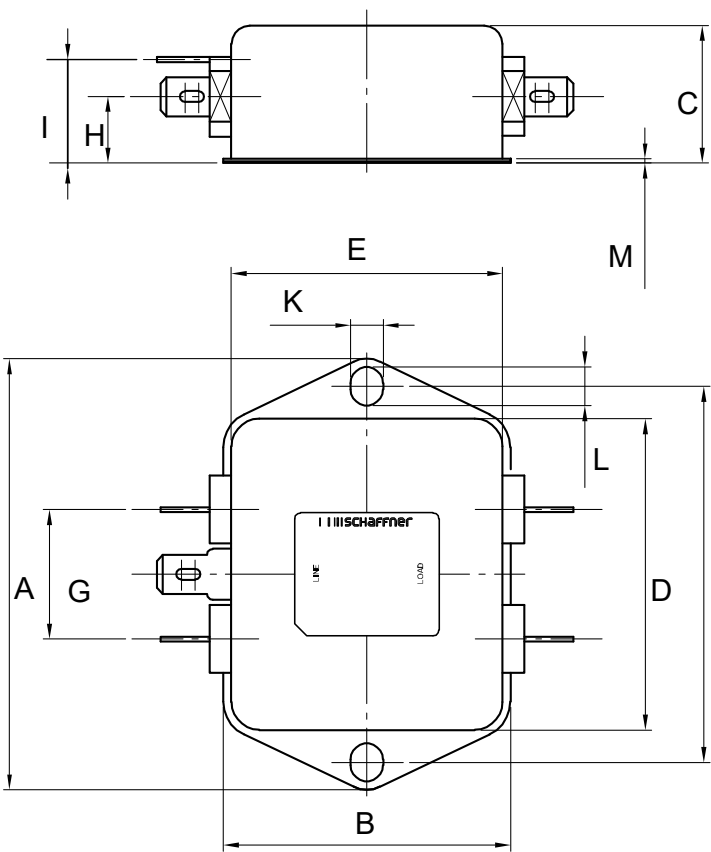


Connection style -07, 8 to 16 A types (same dimensions as style -06)

Connection style -07, 1 to 6 A types (same dimensions as style -06)

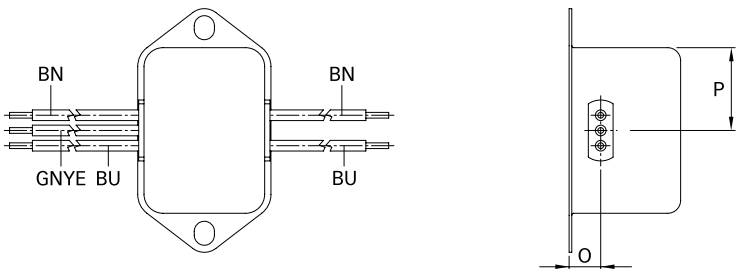

Connection style -08, 16 to 30 A types

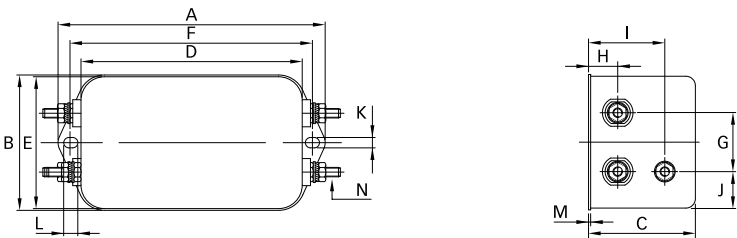

Dimensions

| | 1 A | 3 A | 4 A | 6 A | 8 A | 10 A | 12 A | 16 A | 20 A | 30 A | Tolerances |
|-------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| A | 64 | 71 | 71 | 71 | 85 | 85 | 85 | 85 | 85 | 85 | ±0.5 |
| B | 35 | 46.6 | 46.6 | 46.6 | 54 | 54 | 54 | 54 | 54 | 54 | ±0.5 |
| C | 24.3 | 22.3 | 22.3 | 22.3 | 30.3 | 30.3 | 30.3 | 40.3 | 40.3 | 40.3 | ±0.5 |
| D | 43.5 | 50.5 | 50.5 | 50.5 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | 64.8 | ±0.5 |
| E | 32.5 | 44.5 | 44.5 | 44.5 | 49.8 | 49.8 | 49.8 | 49.8 | 49.8 | 49.8 | ±0.5 |
| F | 54 | 61 | 61 | 61 | 75 | 75 | 75 | 75 | 75 | 75 | ±0.3 |
| G | 21 | 21 | 21 | 21 | 27 | 27 | 27 | 27 | 27 | 27 | ±0.2 |
| H | 9.3 | 10.8 | 10.8 | 10.8 | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 | 12.3 | ±0.5 |
| I | 15.3 | 16.8 | 16.8 | 16.8 | 20.8 | 20.8 | 20.8 | 29.8 | 29.8 | 29.8 | ±0.5 |
| J | 21.8 | 25.25 | 25.25 | 25.25 | 19.9 | 19.9 | 19.9 | 11.4 | 11.4 | 11.4 | ±0.5 |
| K | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | |
| L | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | 6.3 | |
| M | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 | 0.7 | |
| | | | | | | | | | | | |
| Connection style -06 | | | | | | | | | | | |
| N | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | 6.3 x 0.8 | | |
| Connection style -07 | | | | | | | | | | | |
| O | 8.3 | 8.3 | 8.3 | 8.3 | 8.3 | 8.3 | 8.3 | 8.3 | | | ±0.5 |
| P | 21.8 | 14 | 14 | 14 | 14.9 | 14.9 | 14.9 | 14.9 | | | ±0.5 |
| AWG type wire | AWG 20 | AWG 20 | AWG 20 | AWG 18 | AWG 18 | AWG 18 | AWG 16 | AWG 16 | | | |
| Wire length | 140 | 140 | 140 | 140 | 140 | 140 | 140 | 140 | | | +5 |
| Connection style -08 | | | | | | | | | | | |
| N | | | | | | | | M4 | M4 | M4 | |
| Recommended torque (Nm) | | | | | | | | 1.2 - 1.3 | 1.2 - 1.3 | 1.2 - 1.3 | |
| Earth terminal | | | | | | | | 1.5 - 1.7 | 1.5 - 1.7 | 1.5 - 1.7 | |

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according: ISO 2768-m/EN 22768-m

Headquarters, Global
Innovation and
Development

Switzerland
Schaffner Group
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

To find your local partner within
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2023 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application
Centers

Finland
Schaffner Oy
Sauvonrinne 19 H
8500
Lohja
+358 50 468 7284
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
16-20 Rue Louis Rameau
95875
Bezons
+33 1 34 34 30 60
francesales@schaffner.com

Germany
Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185
Karlsruhe
+49 721 56910
germanysales@schaffner.com

India
Schaffner India Pvt. Ltd
Regus World Trade Centre
WTC 22nd Floor Unit No 2238 Brigade
Gateway Campus 26/1 Dr. Rajkumar Road
Malleshwaram (W)
560055
Bangalore
+91 8067935355
indiasales@schaffner.com

United Kingdom
Schaffner Ltd.
Suite 1 Oakmede Place
Terrace Road
RG42 4JF
Binfield
+44 118 9770070
uksales@schaffner.com

United States
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey
+1 732 225 9533
usasales@schaffner.com

Sweden
Schaffner EMC AB
Östermalmstrorg 1
114 42
Stockholm
+46 8 5050 2425
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Industrie Nord
Nordstrasse 11e
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan
Schaffner EMV Ltd.
U-Town
20 Floor-2 No 97 Section 1 XinTai 5th Road
XiZhi District
22175
New Taipei City
+886 226975500
taiwansales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Ticino, 30
20900
Monza (MB)
+39 039 21 41 070
italysales@schaffner.com

Japan
Schaffner EMC K.K.
ISM Sangenjaya
7F 1-32-12 Kamiuma Setagaya-ku
154-0011
Tokyo
+81 3 5712 3650
japansales@schaffner.com

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com